



- Add European style while creating dispense excitement.
- Condition the glass before pouring – invert glass, push down on sprayer for cold water rinsing.
- Draft tower mounts directly to platform tray eliminating coring of counter top.
- Robust 18 gauge stainless steel module with full plywood under support.



Feature

- S** Stainless Steel for improved hygiene and durability.

Specifications


Micro Matic reserves the right to change specifications without notice.

Part No.	Description	Shipping Weight	Box Dimensions
<input type="checkbox"/> DP-1609	Polished Stainless Steel	14 kg	1308mm L x 552mm W x 64mm H
		30 lbs	51 1/2"L x 21 3/4"W x 2 1/2" H

Rinser Water Inlet Installation

- Always check local plumbing codes first.
- Install in-line water regulator set at 30 PSI from the street water supply.
- If tee'd into soda system ensure system can handle increased water demand.
- Install in-line one way check valve from the street water supply.
- Install in-line shut-off for the rinsing system from the street water supply.

Dimensions

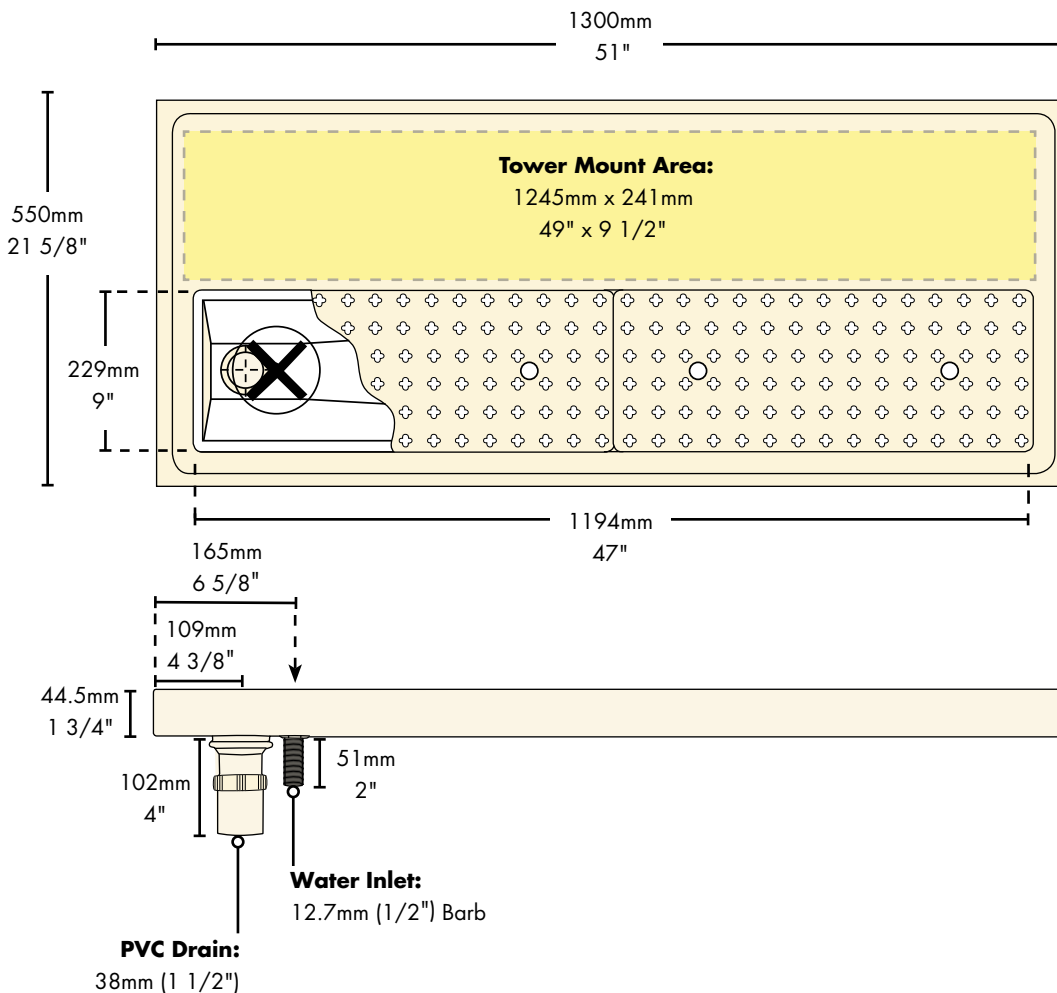

Copyright ©2008 Micro Matic USA, Inc. All Rights Reserved.

00337.D0608 0708



www.micromatic.com

Toll Free: 1-(866) 327-4159

West

19791 Bahama Street
Northridge, CA 91324
Tel. (818) 701-9765
Fax. (818) 701-9844

Central

10726 North Second Street
Machesney Park, IL 61115
Tel. (815) 968-7557
Fax. (815) 968-0363

Southeast

2364 Turbine Court
Brooksville, FL 34604
Tel. (352) 799-6331
Fax. (352) 796-2429

Northeast

4601 Saucon Creek Road
Center Valley, PA 18034
Tel. (610) 625-4464
Fax. (610) 625-4466