



- On-site accurate blending of CO₂ and Nitrogen gases.
- Save money by not purchasing expensive premixed cylinders.
- Save labor by not changing cylinders.
- Increase profits by serving a consistent perfect pint.



Specifications


Micro Matic reserves the right to change specifications without notice. **AUTOQUOTES**

| Part No. | Description | Shipping Weight | Box Dimensions |
|--|-----------------------------|-----------------|-----------------------------|
| <input type="checkbox"/> MM100 | Ales/Lagers: 70% CO2/30% N2 | 4 kg | 406mm L x 305mm W x 229mm H |
| | | 8 lbs | 16"L x 12"W x 9"H |

Performance

| | |
|---------------------------------|---|
| Inlet Barb: | 9.52mm (3/8") |
| Outlet Barb: | 9.52mm (3/8") |
| Inlet Pressure: | 3.80 bar minimum (50 psi minimum) |
| Outlet Pressure: | Factory preset at 3.45 bar (50 psi), non-adjustable |
| Accuracy and Flow Range: | 2% of full scale or better within the flow range of .4 to 40 liters per minute (.85 to 85 cubic feet per hour.) |

Dimensions

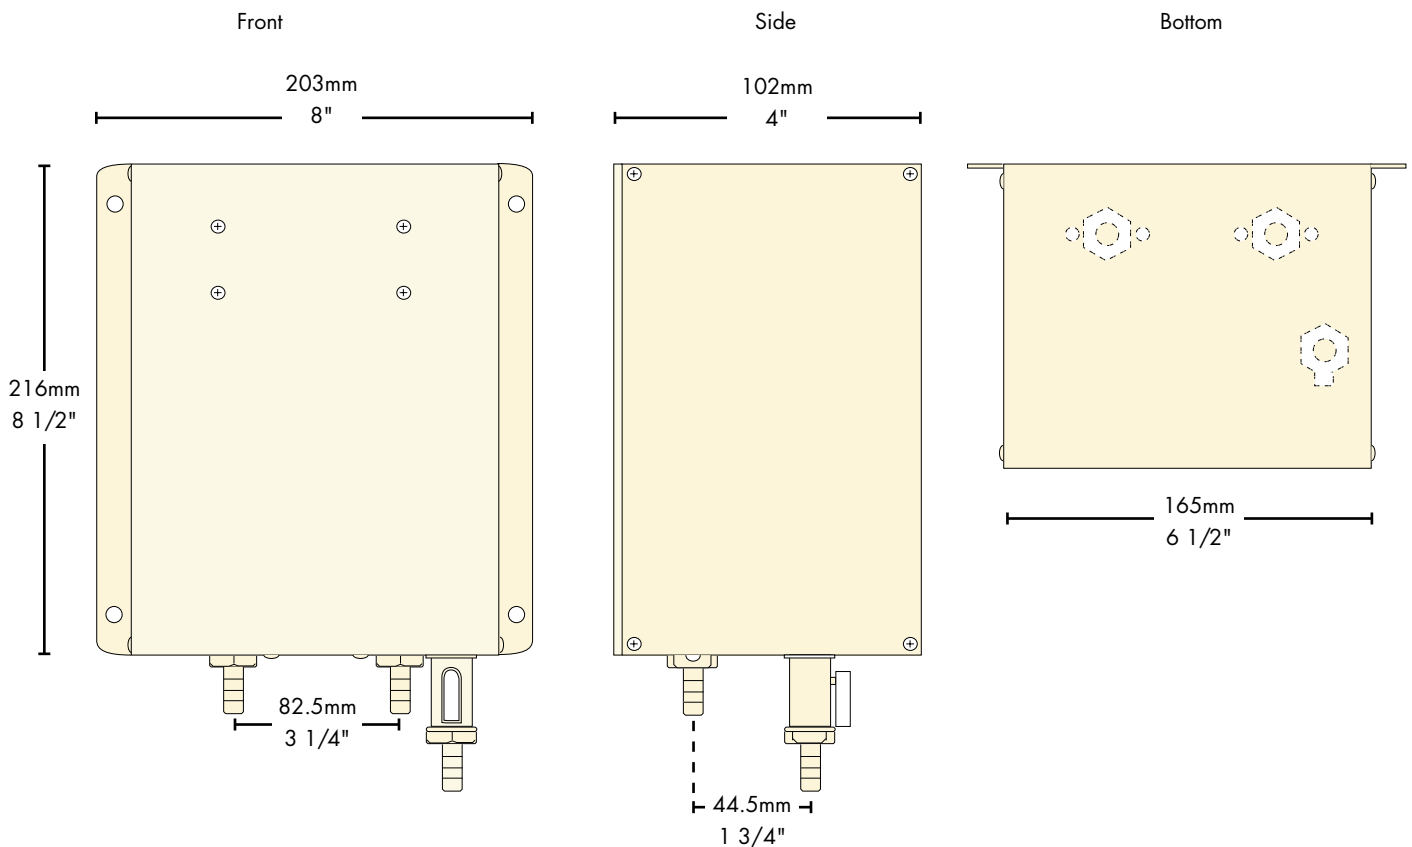

Copyright ©2012 Micro Matic USA, Inc. All Rights Reserved.

00145D0312



MICRO MATIC

www.micromatic.com

Toll Free: 1-(866) 327-4159

| West | Central | Southeast | Northeast |
|---|---|---|---|
| 19791 Bahama Street Northridge, CA 91324 Tel. (818) 701-9765 Fax. (818) 701-9844 | 10726 North Second Street Machesney Park, IL 61115 Tel. (815) 968-7557 Fax. (815) 968-0363 | 2364 Simon Court Brooksville, FL 34604 Tel. (352) 799-6331 Fax. (352) 796-2429 | 4601 Saucon Creek Road Center Valley, PA 18034 Tel. (610) 625-4464 Fax. (610) 625-4466 |