



PRO-LINE™ E-SERIES™ 95" - 5 KEG

- Designed by beer-industry experts for performance and value
- Front breathing for cooling and exhaust



MBB94-E
Black



MBB94S-E
Stainless Steel



MBB94G-E
Black with Glass Doors



MBB94GS-E
Stainless Steel with Glass Doors



*Adjustable Digital Thermostat!
Easy to read exterior mounted*



Listed by Edison Testing Laboratories.
Conforms to UL & NSF Standards.




| Part No. | Door Type | Door Type | Finish | Doors | Shipping Weight | |
|-----------------------------------|-----------|------------------|--------|-----------------|-----------------|------------------|
| <input type="checkbox"/> MBB94-E | Solid | MBB94G-E | Glass | Black | 3 | 184 kg 406 lb |
| <input type="checkbox"/> MBB94S-E | Solid | MBB94GS-E | Glass | Stainless Steel | 3 | 184 kg 406 lb |

Operating Performance

| | | | |
|-------------------------------------|-------------------------|---------------------|------------|
| Keg Capacity of 1/2 Kegs | 5 | Running Amps | 6.5 |
| Cubic Feet (liters) | 39.2 (1112) | Voltage | 115/60/1 |
| Shelves, Flat - Included | 2 | Plug Type | NEMA-5-15P |
| Shelves, Dividers - Included | 4 | Cord Length | 8' |
| Cans 12 oz (355ml) | 1092 | Refrigerant | R-134a |
| Approval | ETL Listed, Energy Star | Charge oz | 9.8 |
| Condenser HP | 1/3 | | |

| | |
|--------------------|--|
| Exterior | All Models: 18 gauge 201 grade stainless steel (s/s) top, 22 gauge solid doors, 24 gauge steel front, sides and back. Black Models: Front, sides, back and doors black vinyl over steel. S/S Models: Front, sides, back and doors are s/s. |
| Interior | 20 gauge stainless steel floor and walls, rugged false floor, reinforced frame |
| Ventilation | Front breathing for cooling and exhaust |
| Plumbing | Automatic condensate evaporator, no drain connection required. Evaporator condensate has been plumbed to a condensate pan located in the compressor housing |
| Insulation | Foamed-in-place using high density, CFC-free polyurethane; 2" top, walls and floor |
| Accessories | Castors or 6" fixed legs |

Dimensions

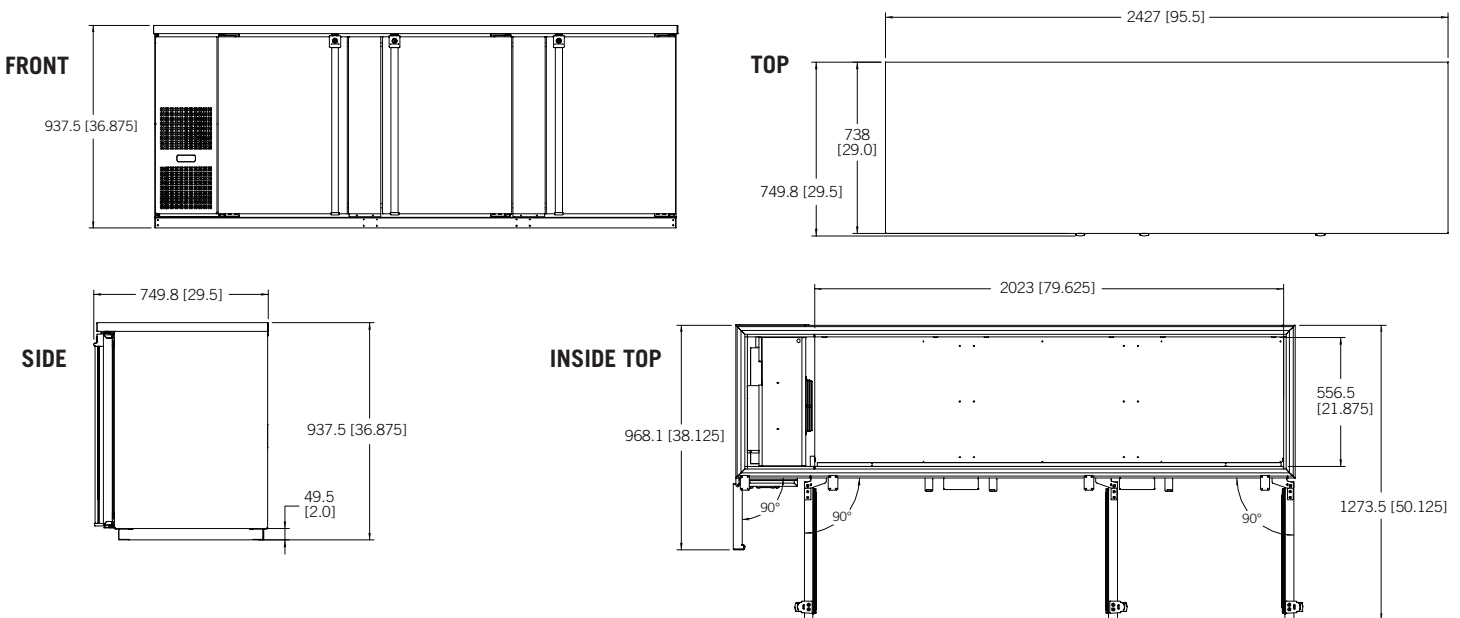

Toll-Free: 1-866-327-4159
www.micromatic.com

West

19791 Bahama St.
Northridge, CA 91324
Tel. (818) 701-9765
Fax. (818) 701-9844

Central

10726 North Second St.
Machesney Park, IL 61115
Tel. (815) 968-7557
Fax. (815) 968-0363

Southeast

2386 Simon Ct.
Brooksville, FL 34604
Tel. (352) 799-6331
Fax. (352) 796-2429

Northeast

4601 Saucon Creek Rd.
Center Valley, PA 18034
Tel. (610) 625-4464
Fax. (610) 625-4466