



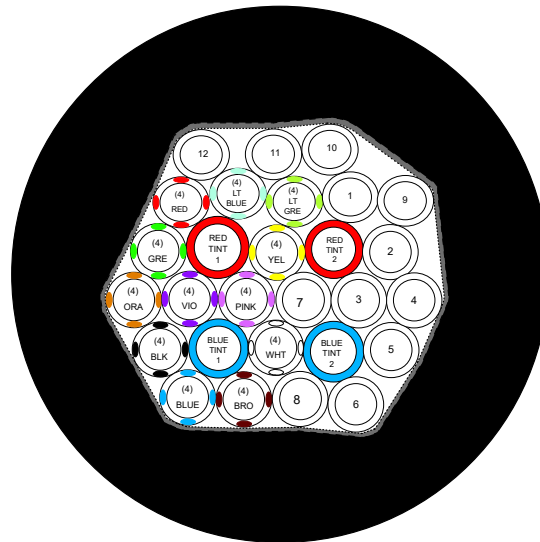

# BARRIERMASTER FLAVOURLOCK TRUNKLINE

24 PRODUCT - 5/16" I.D.

- Barriermaster Flavourlock tubing prevents gas permeation to preserve beverage quality.
- Dependable delivery of virtually all beverages from walk-in to tower.
- Color coded lines for easy identification.

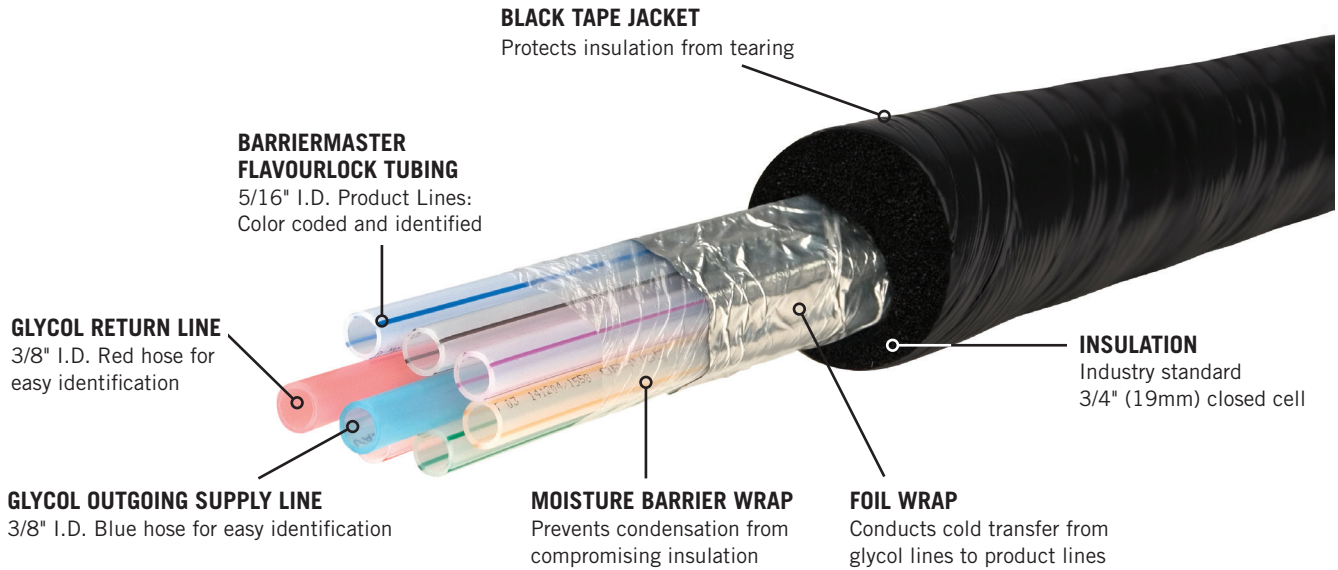

**CDI2454-BF**

**NSF** Standard 51 Listed  
Food Equipment Materials

[www.micromatic.com](http://www.micromatic.com) • 1 (866) 327-4159

24 PRODUCT - 5/16" I.D.

Job Number: \_\_\_\_\_ Location: \_\_\_\_\_

Part No.	Description	Shipping Weight
 CDI2454-BF	24 Product Lines / 4 Glycol Lines	.27 kg (per 305mm) .60 lbs (per foot)

## Performance

<b>Product Lines</b>	7.9mm I.D. (5/16" I.D.) Barriermaster Flavourlock tubing
<b>Glycol Cooling Lines</b>	9.5mm I.D. x 12.7mm O.D. (3/8" I.D. x 1/2" O.D.) polyethylene tubing <b>Outgoing:</b> Blue color coded <b>Return:</b> Red color coded
<b>Moisture Barrier Wrap</b>	Food quality barrier film
<b>Cold Transfer Wrap</b>	Aluminum foil
<b>Insulation</b>	19mm (3/4") closed cell
<b>Black Tape Jacket</b>	Resistant to tearing.
<b>Exterior Marks</b>	Sequential Foot Marking, every 610mm (2 ft.)
<b>Fire Rating</b>	Class 1 - Self-extinguishing to BS3924, Class 1 when applied to insulation.
<b>Certification</b>	NSF/ANSI Standard 51 Food Equipment Materials.

## Dimensions

